


TAP3585 – Enza Tap

Key:	Description:	APX size (mm):	Base material:	Colour:	QTY:
A1	Aerator case	24 x 13	Brass	Chrome	1
A2	Aerator	20.75 x 14	Plastic	Grey/Dark blue	1
A3	Washer	21 x 3	Rubber	Black	1
A4	Spout	240 x 205	Brass	Chrome	1
A5	Anti friction split ring	24 OD x 2.5	PTFE	White	1
A6	O-ring	2 x 22	Rubber	Black	1
A7	O-ring	2 x 22	Rubber	Black	1
A8	Anti friction split ring	1 x 32	PTFE	White	1
A9	Spout grub screw	M5 x 6	Brass	Brass	1
B1	Tap body	100 x 67	Brass	Chrome	1
B2	Base plinth	5 x 48	Brass	Chrome	1
B3	Upper seal	2 x 43	Rubber	White	1
C1	Cold handle	25 x 85	Zamak	Chrome	1
C2	Grub screw	5 x 4	Steel	Steel	1
C3	Crosshead screw	9 x 12	Brass	Brass	1
C4	Valve bush	16 x 12	Plastic	White	1
C5	Cold valve	M20 x 38mm	Brass	Brass	1
D1	Hot handle	25 x 85	Zamak	Chrome	1
D2	Grub screw	5 x 4	Steel	Steel	1
D3	Crosshead screw	9 x 12	Brass	Brass	1
D4	Valve bush	16 x 12	Plastic	White	1
D5	Hot valve	M20 x 38mm	Brass	Brass	1
E1	Upper seal	2 x 42	Rubber	White	1
E2	Fixing stud	M8 x 95	Steel	Silver	1
E3	Stabiliser plate	88 x 58	Plastic	White	1
E4	Lower gasket	45 OD x 3.5	Rubber	Black	1
E5	Metal horseshoe	51 x 5	Steel	Silver	1
E6	Fixing nut	18 x 11 AF	Brass	Brass	1
F1	Hot flexible pipe	M10 x 370 x ½" BSP M	Stainless steel/Brass	Silver/red	1
F2	Non return valve	16 x 15	Plastic	White	1
F3	Cold flexible pipe	M10 x 370 x ½" BSP M	Stainless steel/Brass	Silver/blue	1
F4	Non return valve	16 x 15	Plastic	White	1

TAP3585 – Enza Tap

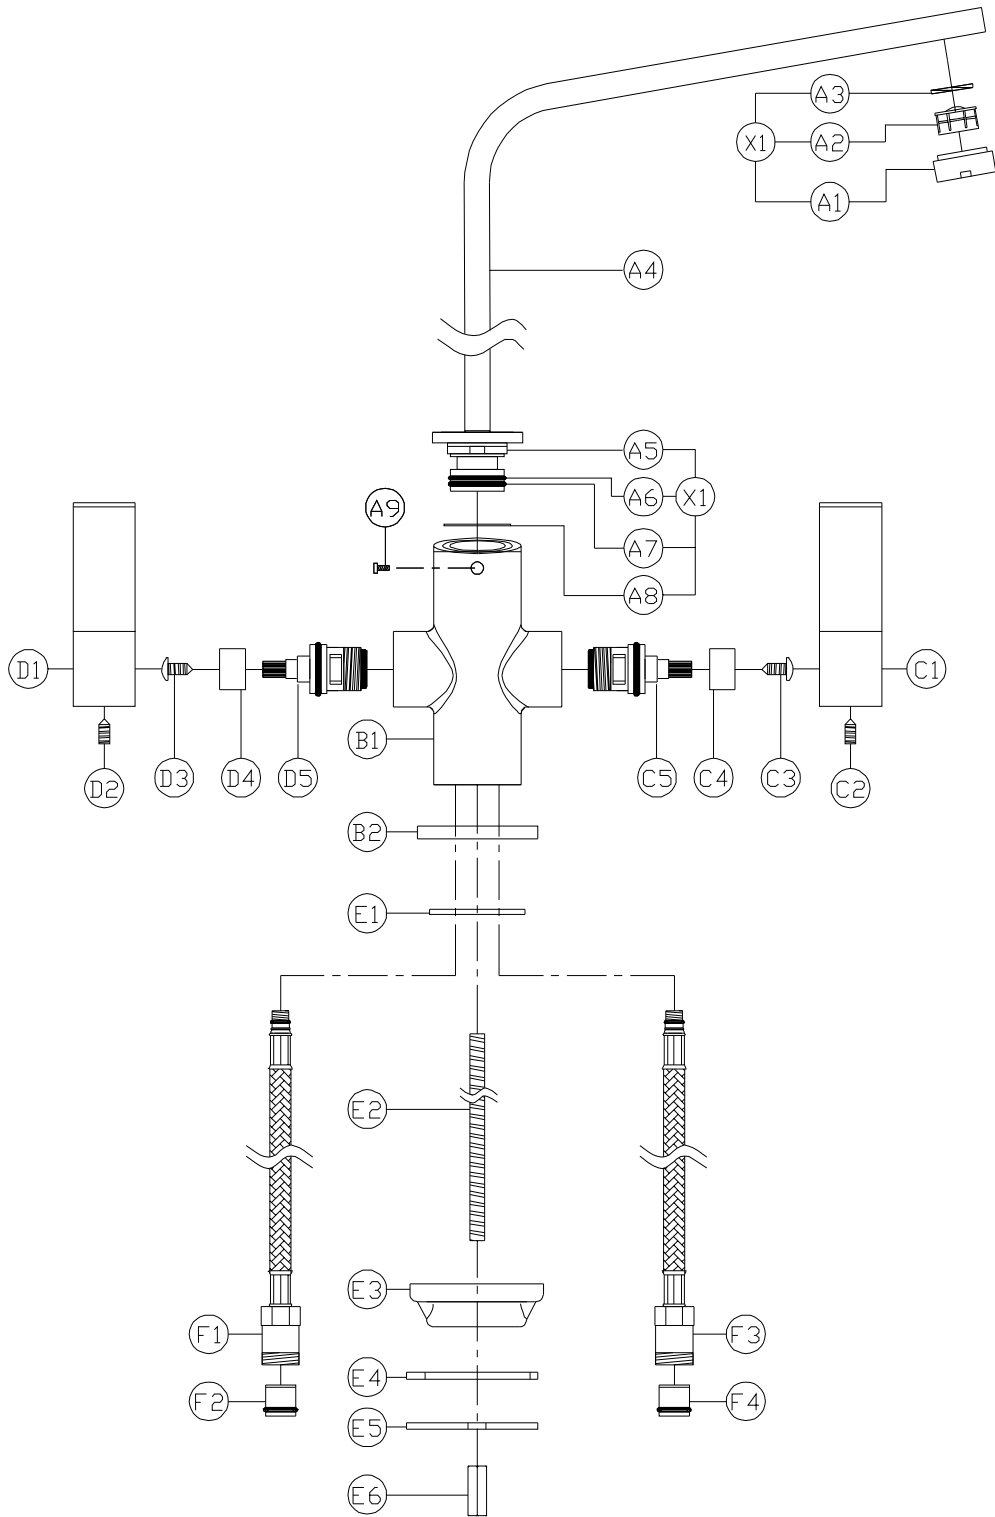

LAMONA
Exclusive to Howdens Joinery Co.

TAP3585 - Enza Mixer Tap service drawing v2

(c) abode home products ltd
www.abode.eu

our policy is to continually
improve and develop products,
and accordingly we reserve the
right to amend specifications
without prior notice

TAP3585 – Enza Tap

General Advice:

- These instructions are intended as a guide only, if you are in any doubt you should seek the advice of a qualified professional.
- Take care not to mark finished parts with screwdrivers or other tools.
- Use a pair of rubber gloves to get a better grip on decorative hand tight parts.
- Ensure all parts are reassembled tightly.
- After maintenance test that all assemblies are water tight and function correctly.
- Always isolate the hot and cold water supplies before starting any maintenance, once isolated you should drain any residual water from your system.

To replace the cold valve:

1. Loosen grub screw (D2) on the underside of handle (D1) using a 2.5mm A/F allen key.
2. Pull handle (D1) horizontally away from the body (B1).
3. Unscrew (D3) and pull bush (D4) away from valve (D5)
4. Using a socket unscrew valve (D5) anticlockwise.
5. Replace the faulty valve (D5) with the new one and assemble in reverse order.

To replace the spout o-rings:

1. Loosen grub screw (A9) on the rear of body (B1) using an allen key.
2. Pull the spout (A4) vertically away from the body (B1).
3. Remove the old o-rings (A6 & A7) using a small screwdriver or similar.
4. If worn, remove the white PTFE spacers (A5 & A8).
5. Ensure the inside of the body (B1) and the spout base is clean of dirt and grit with a soft wet cloth.
6. If required locate the new white PTFE spacers (A5 & A8).
7. Carefully locate the new O-rings (A6 & A7) onto the spout base (A4).
8. Grease the O-rings thoroughly with silicone or alternative similar grease.
9. Reassemble the tap in the reverse order.